

Server Update

For eRAD RIS

Version 3.0

Build 3.2017.6

Update 3.2017.6.8

Table of Contents

Package Contents	3
Intended Audience	3
Who is affected.....	3
New settings	4
System configuration	4
New Features.....	5
Feature # 20930 – Option to automatically restart RADAR SignalR client	5
Resolved Items	6
Code Stream	7
eRAD RIS Release Version Numbers	8
Installing	9
Client/GUI.....	9
Web Service	9
Database Updates	11

PACKAGE CONTENTS

 _ReleaseNotes	06/08/18 4:26 PM
 DB	06/08/18 11:52 AM
 PatientConnect	06/08/18 11:53 AM
 Questionnaires	06/08/18 11:52 AM
 ReferringConnect	06/08/18 11:53 AM
 rRISService	06/08/18 11:52 AM
 ThickClient	06/08/18 11:52 AM
 UM_Portal	06/08/18 11:52 AM
 Build_2017.6.8.7z	06/08/18 4:36 PM

INTENDED AUDIENCE

The intended audience for this document is the RadNet Clinical Systems team and the eRAD Support/Service team.

It is appropriate to share the document with any customers applying the patch, in order to review new feature descriptions and resolved defects.

WHO IS AFFECTED

Build 2017.6 installs. This server update must be applied to 2017.6.7.

NEW SETTINGS

SYSTEM CONFIGURATION

Setting	Default	Purpose
RADARInboundChannelRestartInterval	-1	(value = int) Controls how often (in minutes) the RADAR Inbound message channel will be restarted. (Feature is turned off when value is less than 1.)

NEW FEATURES

FEATURE # 20930 – OPTION TO AUTOMATICALLY RESTART RADAR SIGNALR CLIENT

The RADAR SignalR client manages inbound messaging from the RADAR EventBroker service. Previously, if the RADAR Wedge plugin lost connection to the RADAR event broker, it would fail to reconnect resulting in the loss of inbound RADAR message notifications. This resulted in report delivery statuses for reports with an Email distribution method not being received and report delivery jobs stayed at 'In progress' on the Document Distribution WL, even though they had been successfully delivered. It also impacted other inbound RADAR messages, such as SecurePIC replies.

To prevent this from happening, it is now possible to restart the RADAR SignalR client from within the RADAR Wedge plugin. This feature will restore the inbound connection to RADAR without restarting the Wedge service.

A new System Configuration setting has been added:

RADARInboundChannelRestartInterval

- Controls how often (in minutes) the RADAR Inbound Message channel will be restarted.
- The feature will be turned off if the value for this setting is less than 1.
- Default = -1 (meaning the new feature will be off by default)
- Recommended setting: if RADAR inbound messaging is enabled, the recommended value is 120.

In the RADARWedgePlugin, if Inbound is enabled and the new configuration setting is set to a value of 1 or higher, a timer is created and started. Once the timer has elapsed, the RADAR SignalR Client is disconnected and recreated, then attempts to reconnect to the RADAR Event Broker. Console messaging has been added to display when the client disconnects and connects to the RADAR Event Broker.

Recommended Use: RADAR inbound notifications are available for 8 hours before expiring.


If ***RADARInboundChannelRestartInterval*** is set to 120 minutes, this will restart the RADAR SignalR Client periodically to ensure inbound notifications are being received without having to monitor report delivery on the Distribution WL or the Wedge service itself.

RESOLVED ITEMS

Redmine # for 2017.6.8	Subject
21228	Linked Reporting: Rescheduling a "Report together" procedure plan no longer breaks the links.
21217	Linked Reporting: Changing the primary procedure in a procedure plan is now correctly breaking the link.
21055	Linked Reporting: Changing the primary procedure on a manually linked set of studies now correctly maintains the link.
21214	GE PACS IW integration via Accession Number: new configuration option is now properly applied even if there are multiple PACS IW entries.
21083	UM Connect Portal: Exception no longer occurring on Exam Detail page when opening an order with both active and inactive study items.
21081	UM Connect Portal Admin Tool: Resolved an issue in which sending a message to "all users" was incorrectly sending the message to all Provider Portal users, instead of UM Portal users.
21065	Resolved a performance issue that occurred when importing a study from CD when the study UID or patient ID were missing (null checks added).
21040	Imagine Pay Integration now has additional logging and exception handling.
19803	SecurePIC Requests can be properly initiated when the patient does not have an email address.

The following fixes from 2018.1 were pulled into this patch for early release.

Redmine # for 2017.6.8	Redmine # for 2018.1	Subject
21064	19810	Eligibility: United HealthCare is now pulling the correct patient address.

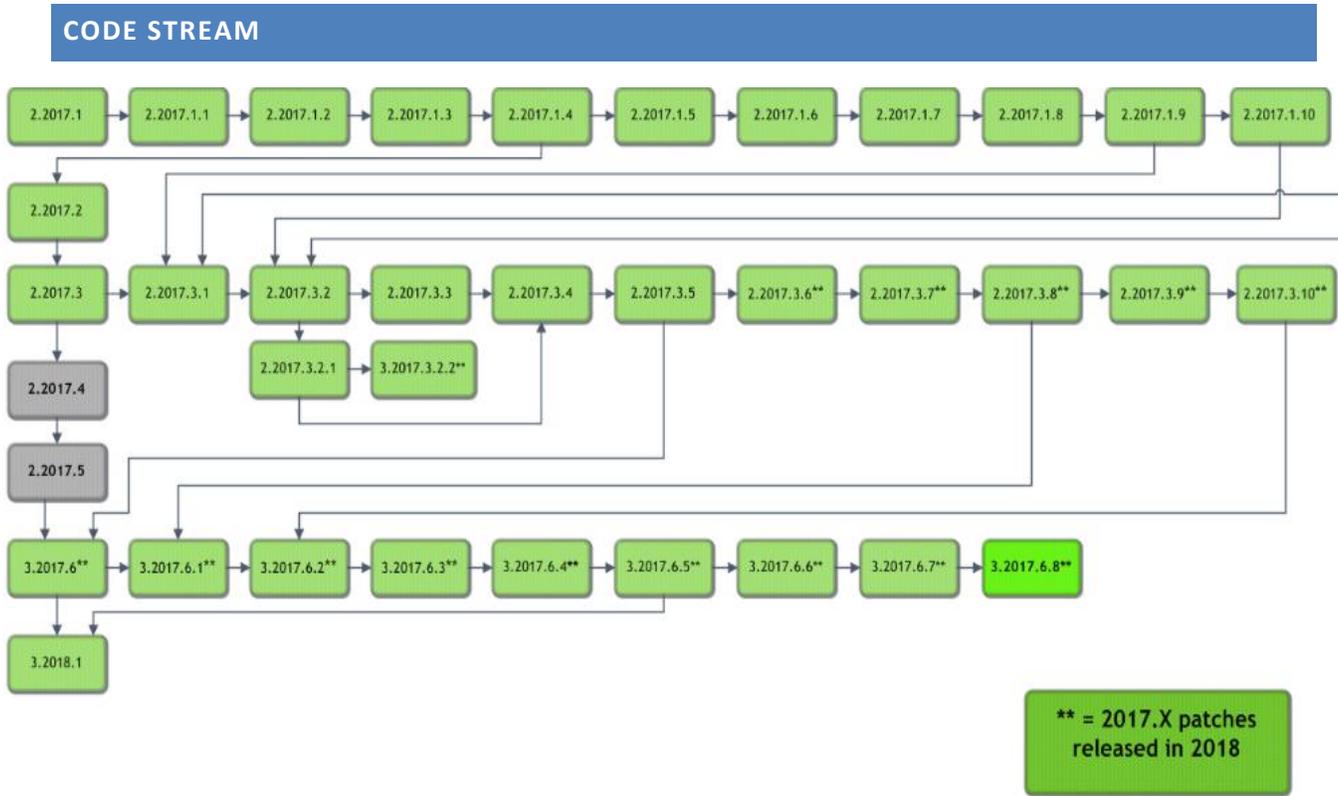

Legend:

Light Green = Previously Released software

Gray = Internal version, non-release version

Bright Green = Current Release

ERAD RIS RELEASE VERSION NUMBERS

Build	Patch	UI Version	Core Version	WS Version	DB Version	Digital Forms	Patient Portal	UM Portal	Provider Portal	Notes
2017.1	-	2.17.1.0 (3GB)	2.17.1.0	2.17.1.0	2.17.1.0.00559886	2.17.1.0	2.17.1.0.572290	2.17.1.0.00000		Full Version Release
2017.1	1	2.17.1.1 (3GB)	2.17.1.0	2.17.1.1	2.17.1.1.00589952	2.17.1.0	2.17.1.0.572290	2.17.1.0.00000		GUI, Web Service and DB updates
2017.1	2	2.17.1.2 (3GB)	2.17.1.0	2.17.1.2	2.17.1.2.00621962	2.17.1.0	2.17.1.0.572290	2.17.1.0.00000		GUI, Web Service and DB updates
2017.1	3	2.17.1.3 (3GB)	2.17.1.0	2.17.1.3	2.17.1.3.00640480	2.17.1.0	2.17.1.0.572290	2.17.1.0.00000		GUI, Web Service and DB updates
2017.1	4	2.17.1.4 (3GB)	2.17.1.0	2.17.1.4	2.17.1.4.00692239	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI, Web Service, DB and Patient Portal updates
2017.1	5	2.17.1.4 (3GB)	2.17.1.0	2.17.1.5	2.17.1.4.00692239	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		Web Service
2017.1	6	2.17.1.6 (3GB)	2.17.1.0	2.17.1.5	2.17.1.6.00745281	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI and DB Updates
2017.1	7	2.17.1.7 (3GB)	2.17.1.0	2.17.1.5	2.17.1.6.00745281	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI update
2017.1	8	2.17.1.8 (3GB)	2.17.1.0	2.17.1.5	2.17.1.6.00745281	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI update
2017.1	9	2.17.1.9 (3GB)	2.17.1.0	2.17.1.5	2.17.1.6.00745281	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI update
2017.1	10	2.17.1.10 (3GB)	2.17.1.0	2.17.1.10	2.17.1.6.00745281	2.17.1.0	2.17.1.4.701924	2.17.1.0.00000		GUI and Web Service update
2017.2	-	2.17.2.0(3GB)	2.17.2.0	2.17.2.0	2.17.2.0.00695782	2.17.2.0	2.17.2.0.702238	2.17.2.0.702213	2.17.2.0.702226	Full Version Release. First release of Provider Portal
2017.3	-	2.17.3.0(3GB)	2.17.3.0	2.17.3.0	2.17.3.0.00764112	2.17.3.0	2.17.3.0.321	2.17.3.0.321	2.17.3.0.321	Full Version Release. Including Patient, Provider and UM Portals
2017.3	1	2.17.3.1(3GB)	2.17.3.0	2.17.3.1	2.17.3.1.00846328	2.17.3.1	2.17.3.1.853299	2.17.3.1.853301	2.17.3.1.856171	GUI, Web Service, DB. Including Patient, Provider and UM Portals
2017.3	2	2.17.3.2(3GB)	2.17.3.0	2.17.3.2	2.17.3.2.00898348	2.17.3.2	2.17.3.2.913898	2.17.3.2.913899	2.17.3.1.856171	GUI, Web Service, DB. Including Patient, Provider and UM Portals
2017.3	2.1	2.17.3.2.1(3GB)	2.17.3.0	2.17.3.2	2.17.3.2.00898348	2.17.3.2	2.17.3.2.913898	2.17.3.2.913899	2.17.3.1.856171	GUI Only
2017.3	2.2	2.17.3.2.1(3GB)	2.17.3.0	2.17.3.2.2	2.17.3.2.00898348	2.17.3.2	2.17.3.2.913898	2.17.3.2.913899	2.17.3.1.856171	Web Services only
2017.3	3	2.17.3.3(3GB)	2.17.3.0	2.17.3.3	2.17.3.3.00954008	2.17.3.2	2.17.3.3.962869	2.17.3.3.962870	2.17.3.3.962870	GUI, Web Service, DB. Including Patient, Provider and UM Portals
2017.3	4	2.17.3.4(3GB)	2.17.3.0	2.17.3.4	2.17.3.4.00987562	2.17.3.2	2.17.3.3.962869	2.17.3.3.962870	2.17.3.3.962870	GUI, Web Service and DB
2017.3	5	2.17.3.5(3GB)	2.17.3.0	2.17.3.5	2.17.3.5.01023250	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	GUI, Web Service, DB, Patient Portal, Referring Portal, UM Portal
2017.3	6	2.17.3.6(3GB)	2.17.3.0	2.17.3.6	2.17.3.6.01065114	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	GUI, Web Service, DB,
2017.3	7	2.17.3.7(3GB)	2.17.3.0	2.17.3.6	2.17.3.6.01065114	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	GUI
2017.3	8	2.17.3.8(3GB)	2.17.3.0	2.17.3.8	2.17.3.6.01065114	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	GUI and Web Service
2017.3	9	2.17.3.8(3GB)	2.17.3.0	2.17.3.9	2.17.3.6.01065114	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	Web Service
2017.3	10	2.17.3.10(3GB)	2.17.3.0	2.17.3.10	2.17.3.10.01125764	2.17.3.2	2.17.3.5.1023087	2.17.3.5.1025862	2.17.3.5.1023087	GUI, Web Service and DB updates
2017.6	-	3.17.6.0(3GB)	3.17.6.0	3.17.6.0	3.17.6.0.01037550	3.17.6.0	3.17.6.0.1037868	3.17.6.0.1037869	3.17.6.0.1037869	Full Version Release. Including Patient, Provider and UM Portals
2017.6	1	3.17.6.1(3GB)	3.17.6.0	3.17.6.1	3.17.6.1.01094077	3.17.6.0	3.17.6.0.1037868	3.17.6.0.1037869	3.17.6.0.1037869	GUI, Web Service and DB updates
2017.6	2	3.17.6.2(3GB)	3.17.6.0	3.17.6.2	3.17.6.2.01130171	3.17.6.2	3.17.6.2.1138297	3.17.6.2.1138298	3.17.6.2.1138298	GUI, Web Service, DB, Patient, Provider and UM Portals and Digital Forms
2017.6	3	3.17.6.3(3GB)	3.17.6.0	3.17.6.3	3.17.6.3.01166033	3.17.6.3	3.17.6.3.1168622	3.17.6.3.1168622	3.17.6.3.1168623	GUI, Web Service, DB, Patient, Provider and UM Portals and Digital Forms
2017.6	4	3.17.6.4(3GB)	3.17.6.0	3.17.6.4	3.17.6.4.01187509	3.17.6.4	3.17.6.4.1190295	3.17.6.4.1190295	3.17.6.4.1190295	GUI, Web Service, DB, Patient, Provider and UM Portals and Digital Forms
2017.6	5	3.17.6.5(3GB)	3.17.6.0	3.17.6.5	3.17.6.4.01187509	3.17.6.4	3.17.6.5.1199064	3.17.6.5.1199063	3.17.6.5.1199064	GUI, Web Service, Patient, Provider and UM Portals
2017.6	6	3.17.6.6(3GB)	3.17.6.0	3.17.6.6	3.17.6.6.01236363	3.17.6.4	3.17.6.5.1199064	3.17.6.5.1199063	3.17.6.5.1199064	GUI, Web Service and DB updates
2017.6	7	3.17.6.7(3GB)	3.17.6.0	3.17.6.7	3.17.6.7.01257812	3.17.6.7	3.17.6.7.1266287	3.17.6.7.1266287	3.17.6.7.1266287	GUI, Web Service, DB, Digital Forms, Patient, Provider and UM port
2017.6	8	3.17.6.8(3GB)	3.17.6.0	3.17.6.8	3.17.6.8.01276873	3.17.6.8	3.17.6.8.1280869	3.17.6.8.1280870	3.17.6.8.1280869	GUI, Web Service, DB, Digital Forms, Patient, Provider and UM portals
2018.1	-	3.18.1.0(3GB)	3.18.1.0	3.18.1.0	3.17.6.4.01187509	3.18.1.0	3.18.1.0.1229289	3.18.1.0.1229290	3.18.1.0.1229290	Full version release

INSTALLING

CLIENT/GUI

Copy and replace the current rRIS...zip file with the eRAD_rRIS_2017.6.8.zip file provided with this release.

Be sure to make a backup of the ris.exe.config file contained within the current .zip folder.

WEB SERVICE

This updated is only required for the Wedge Web Services. The Core RIS Service and Document Distribution Service are not required to be updated.

1. The web service upgrade consists of replacing the files in the RIS Web Service directory with the files supplied in the rRISService folder with this build. Always create a backup of the files being replaced. This upgrade includes 141 files in the rRISService folder and 7 sub folders. Of those folders, 1 is a folder titled “XSL” that contains a sub folder and files within the subfolder. Another folder is titled “**deploy**” that contains the new .config files that will be deployed with the user of the file called “ServicesConfigWizard.exe” (see instructions below). Folders are (Arabic), en_AU (Australian English), en-ZA (South Africa), he (Hebrew), pt_BR (Brazilian Portuguese), es-AR (Argentina Spanish) and ru-RU (Russian) and are localization folders. The WedgePlugins folder contains various plugin files for RADAR, MIRTH, Ensemble, etc...

Services Configuration Wizard

With the release of 42 to decrease the chance of losing configuration setting and missing new configuration options, we will no longer include the configuration files in the release in the main set of files, but they will now exist in a “deploy” folder, which will contain the three site configurable config files; applicationsettings, connectionstrings, and services as well as a copy of the rRISServices.exe configuration file. The contents of this folder should not be required to be touched.


On the install of a new service, all files will be copied to the appropriate locations on the server (no configurations will be over written). If instructed or to confirm no new configurations have been added the user can run the new application “ServicesConfigWizard.exe”

This application will read the existing configuration file(s) (if files exist), and compare to the provided new configuration files then will display three tabs, for each configuration file:


Application Settings: all existing configuration value will be displayed, if there are any new configuration entries they will be displayed in red.

No part of this material may be published, reproduced, stored in a retrieval system, or transmitted

in any form or by any means without the prior written permission from eRAD.

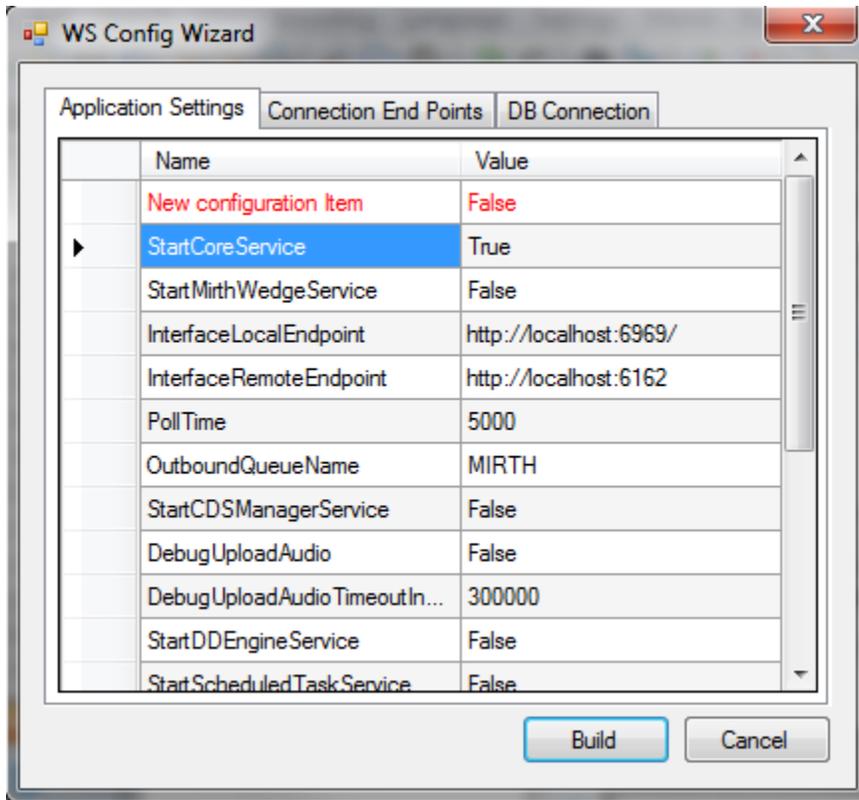

Connection End Points: will display the existing configuration, if the value is left blank then that entry will not be created, in the case of “Study Service” or “CDS Service” if both http and net.tcp were not provided then that endpoint will not be created at all.

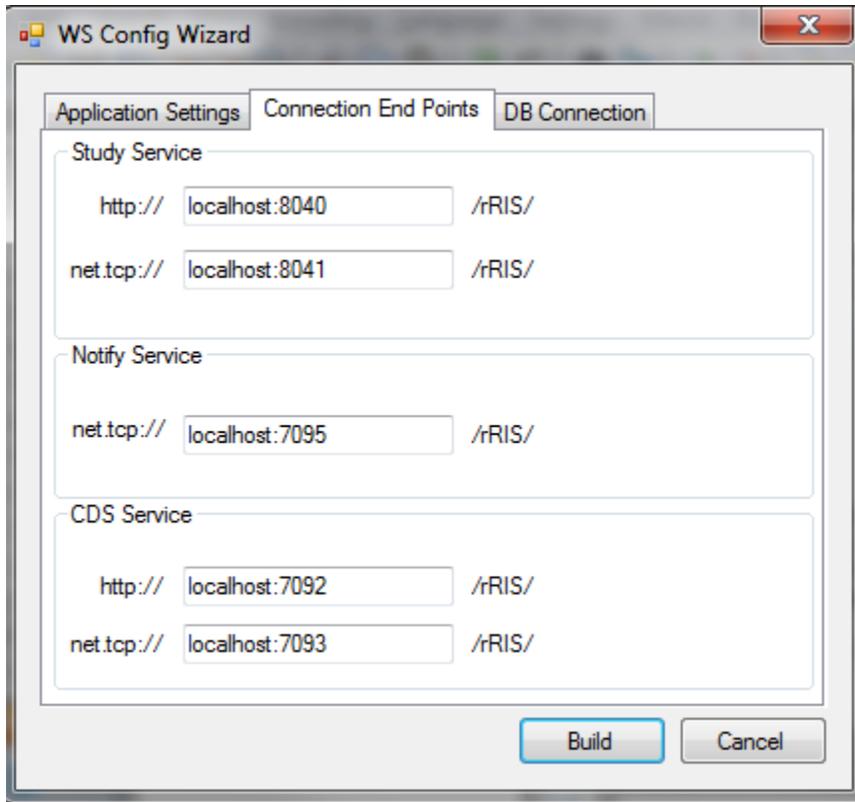

DATABASE UPDATES

Always run the upgrade scripts in a test environment of the actual database to make sure they run cleanly. If any errors occur please contact development.

Note: There is a new upgrade process introduced with B43.1 called "RunUpgrade.bat". The batch file will open a command window. This process will prompt you for the database server name, database name and authentication credentials. There is no need to run the database upgrade scripts manually as was done in previous releases.


- 1) From the upgrade folder, double click the “RunUpgrade.bat” command file.
- 2) Enter the server name, database name and authentication credentials to the database. You have 2 choices for authentication credentials.

No part of this material may be published, reproduced, stored in a retrieval system, or transmitted

in any form or by any means without the prior written permission from eRAD.

- 3) You can choose to use “Trusted connection”. Using this option will pass the identity of the currently logged on user. If this user has “db_owner” access to the eRAD RIS database then feel free to use this options.
- 4) If you decide not to use “Trusted connection” then you will be prompted for user id and password.

Example:

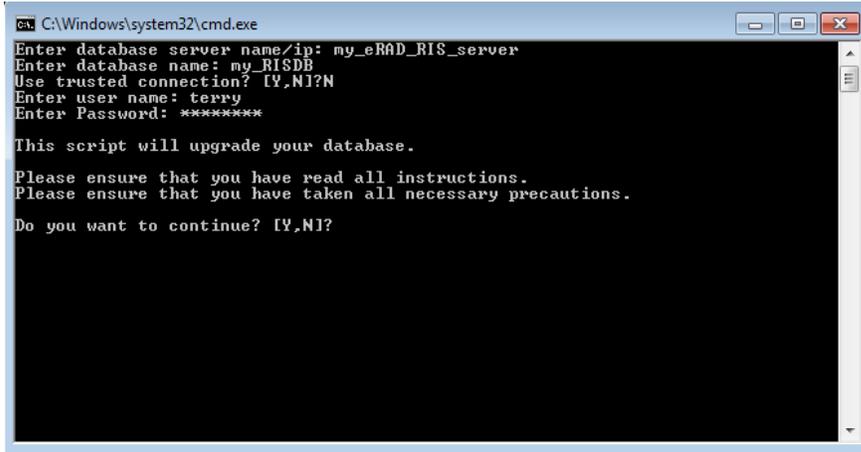

- 5) After the upgrade program has finished you can find the upgrade logs in the “log” folder. The file name will be eRAD_RIS_db_upgrade_timestamp.log, where timestamp is a value representing the date and time the upgrade started. If you see any errors please contact the development team